



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R8W


SEC 20 | SEC 21
SEC 29 | SEC 28

U.S.B.&M.

J-9



SCALE: 1"=30'

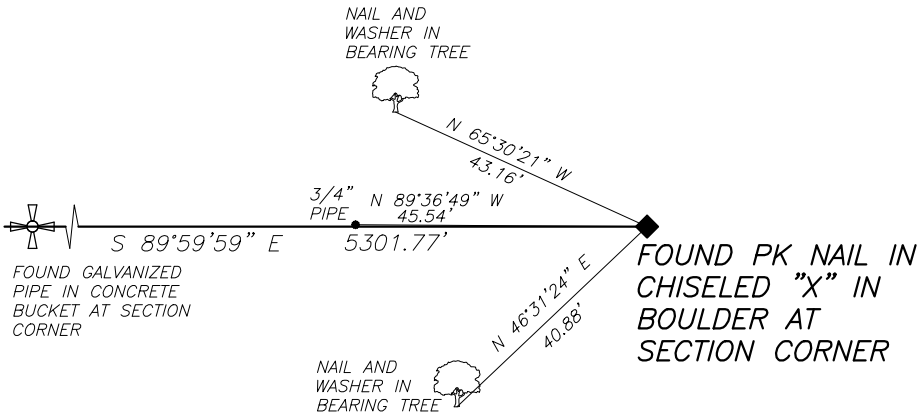

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT
LOCATED AT LAT. 40°11'44.89846"N AND LONG.
110°49'41.53893"W USING THE UTAH STATE G.P.S.
VIRTUAL REFERENCE STATION CONTROL NETWORK
MAINTAINED AND OPERATED BY THE AUTOMATED
GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND PK NAIL IN CHISELED "X" IN BOULDER
AT POSITION OF SECTION CORNER

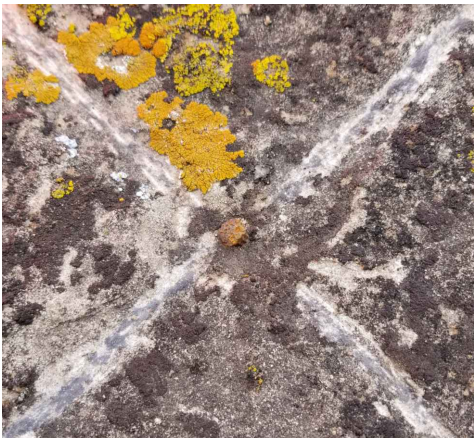


PHOTO OF CHISELED "X" IN BOULDER

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7241568.439
E: 1835336.257
NAVD88 EL: 6613.49'

LATITUDE: 40°11'52.41498" N
LONGITUDE: 110°48'07.85342" W
ELLIPSOID HEIGHT: 6558.02'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300030S0080W0_300300



PHOTO OF ROD ON CHISELED "X" IN BOULDER

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 13 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

